

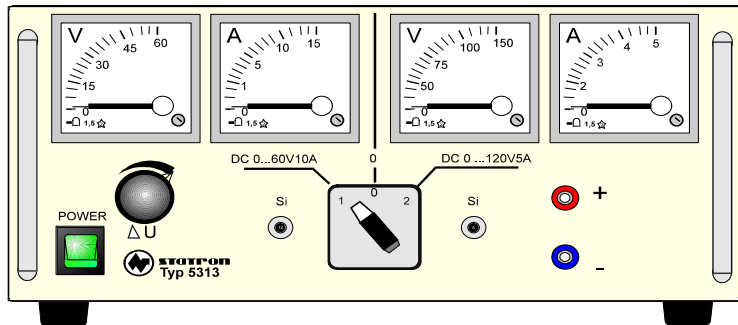


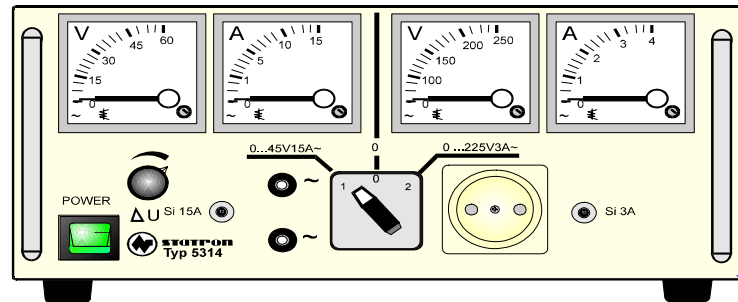

Equipment qualities

- thermal circuit breaker on front panel
- output mass free
- galvanically separated to input
- all purpose
- lighted switch
- circuit indicator

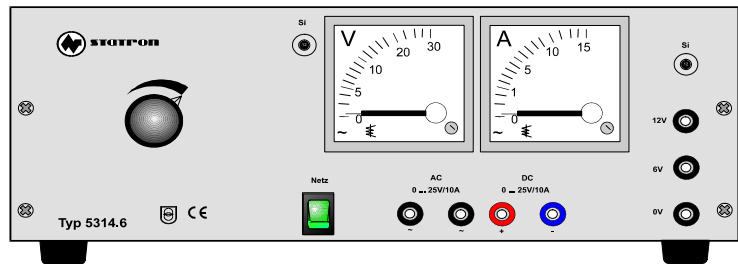

technical parameter

	specification	type	5313.4	5314.0	5314.6
AC	output voltage AC			0-45V oder 0-225V	0-25V und 6V/12V
AC	output current AC			15A / 3A	10A
				switching	or
DC	output voltage AC		0-60V switching 0-120V	no	0-25V
DC	output current AC		10A oder 5A		10A
	dimensions WxHxD mm		360x170x310		
	weight kg		18 kg	18 kg	17 kg
AC	input voltage		230V +6/-10% 50 Hz		
	display		keine	U und I	Spannung und Strom
	display		U und I je Quelle (4 Stück)	keine	keine
	safety class		I		
	color		RAL 7035		
	connector input		ac power line		
	connector output		4mm sockets	4mm safety sockets/fermale	4mm safety sockets
AC	testing voltages		EN 61010 ; EN 61558-2-4		
	operating temperature		0 - 50°C		
	max. relative humidity		90% by 35°C		
	electromagnetic compatibility		EN 61000-6-3 ; EN 61000-6-2		