

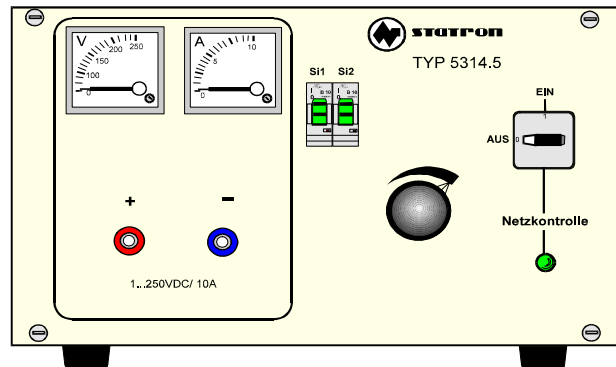
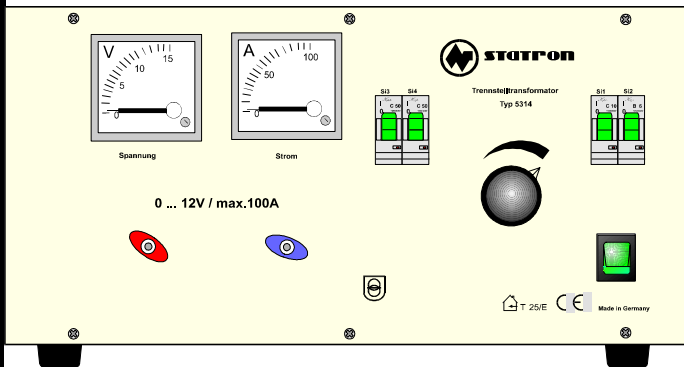


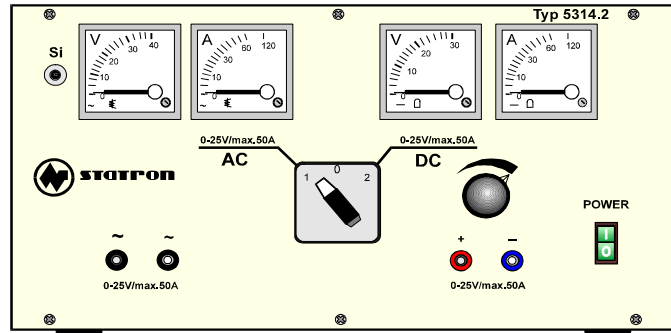

Equipment qualities

thermal circuit breaker on front panel

- output mass free
- galvanically separated to input
- lighted switch
- all purpose
- excess temperature protection
- short-circuit proof

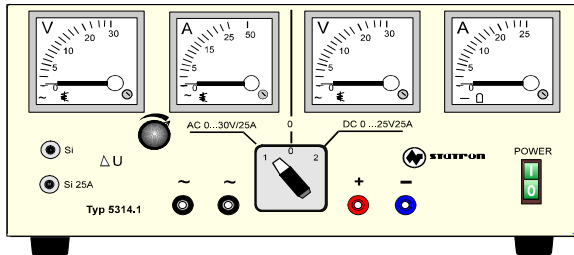

technical parameter:

specification	type	5314.23	5314.1	5314.2	5314.5
		isolating transformer			
output voltage AC			0-30V	0-25V	
			oder	oder	
output voltage DC		0-12V	0-25V	0-25V	1-250V
output current DC		100A	25A	50A	10A
dimensions WxHxD mm		450x240x350	360x210x330 mm	450x240x370	
weight		38 kg	25 kg	37 kg	60 kg
AC input voltage		230V +6% / -10% 50 Hz			
display voltage		voltage and current			
display current		voltage and current			
safety class		I			
color		RAL 7035			
connector input		ac power line			
connector output		4mm safety sockets			
AC testing voltages		61010 ; EN 61558-2-4			
operating temperature		0 - 50°C			
max. relative humidity		80% by 35°C			
electrmagnetic compatibility		EN 61000-6-3 ; EN 61000-6-2			