




equipment qualities

- transformer with rectifier
DIN VDE 0551 for open frame
- fuse intecreted
- create for electrical board

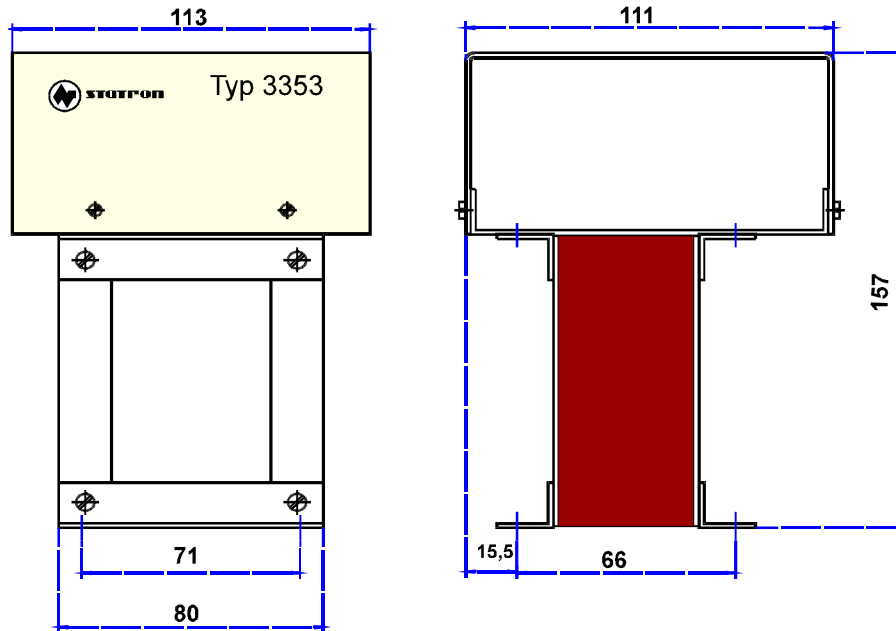

technical parameter:

| specification | type | 3351.0 | 3353.0 | 3354.0 |
|-------------------------------|------|-----------------------------|-------------|-------------|
| DC output voltage | | 24V | 24V | 24V |
| DC output current | | 1A | 5A | 12A |
| dimensions WxHxD mm | | 111x130x113 | 111x160x113 | 111x223x113 |
| weight | | 1,6 kg | 3,1 kg | 5,3 kg |
| AC input voltage | | 230V +6%/- 10% 48-62Hz | | |
| display | | LED for output voltage | | |
| safety class | | I | | |
| color | | RAL 7035 | | |
| degree of protection | | IP 00 | | |
| electric connections input | | clamps 2,5 mm ² | | |
| electric connections output | | clamps 2,5 mm ² | | |
| AC testing voltages | | EN 61010 ; EN 61558-2-4 | | |
| operating temperature | | 0 - 35°C | | |
| max.relative humidity | | 80% by 35°C | | |
| electromagnetic compatibility | | EN 61000-6-3 ; EN 61000-6-2 | | |

option

- Nr.
5 AC input voltage 115V