



STATRON

Gerätetechnik GmbH




not galvanically separated transformer

rated power

250...5000 VA

equipment qualities

- thermalmagnetic protective switches at front
- one phases transformer
- security primarily / secondarily
- not galvanically separated

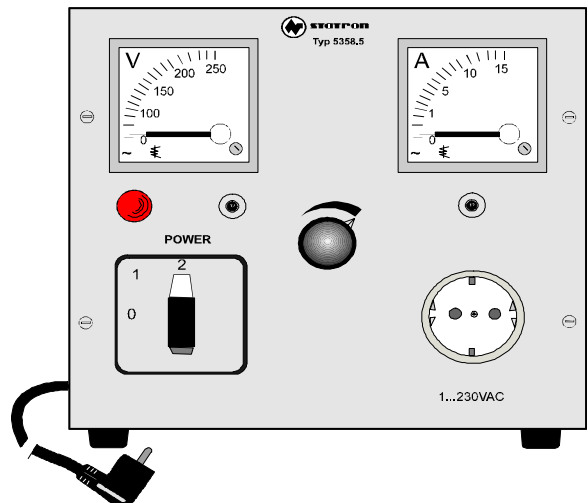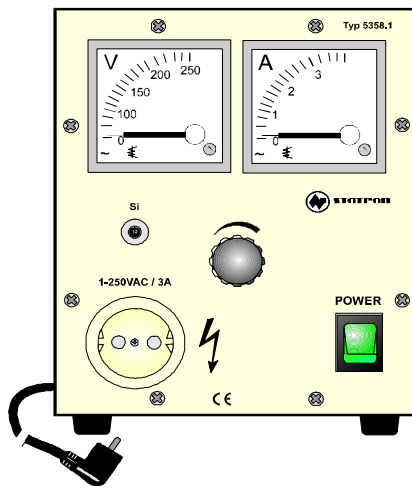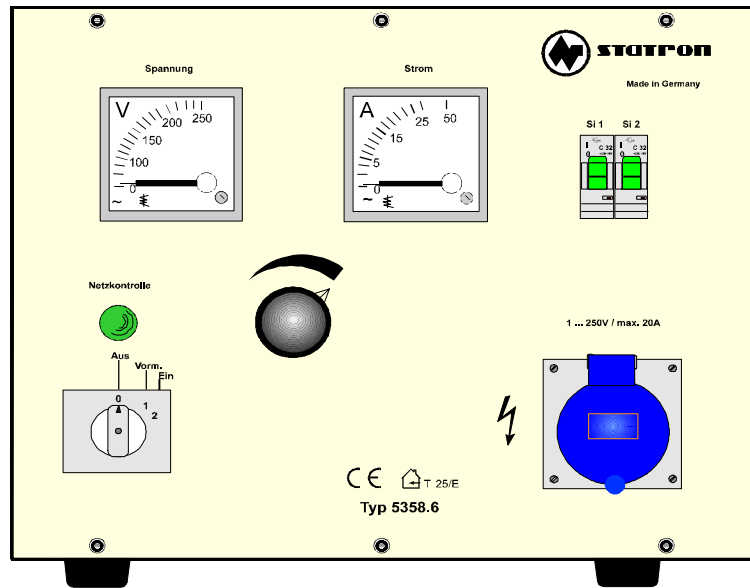

technical parameter:

spezifikation	type	5358.0	5358.1	5358.3	5358.5	5358.6
AC output voltage		2 - 250 V AC				
AC output current		max.1A	max.3A	max.6A	max.10A	max.20A
dimensions WxHxD mm		183x232x252		260x240x230		380 x 300 x 320
weight		3,5 kg	9 kg	12 kg	18 kg	26 kg
AC input voltage		230V +6%/- 10% 50Hz				
starting current limiter		no		starting current limiter		
display		analog panel meter class 2,5 for voltage and current				
safety class		I				
color		RAL 5012 F-pl.silber elox.		RAL 7035		
degree of protection		IP 30				
electric connections input		cable 3 pool				
electric connections output		power connector 2 pools				
AC testing voltages		EN 61010 ; EN 61558-2-4				
operating temperature		0 - 40°C				
max.relative humidity		80% by 35°C				
electromagnetic compatibility		EN 61000-6-3 ; EN 61000-6-2				

STATRON Gerätetechnik GmbH
 Ehrenfried-Jopp-Str.59
 15517 Fürstenwalde
 Tel.:+49 3361 372101
 Fax :+49 3361 372103
 e-mail:statron@statron.de
 Internet: www.statron.de